



Compact  
Fluorescent Lamps  
Non-Integrated



# Compact Fluorescent Lamps Non-Integrated

Efficient, versatile solutions for compact spaces

Compact Fluorescent Lamps (CFL) have an important role to play in terms of protecting the environment through reduced energy consumption and the resulting cut in CO<sub>2</sub> emissions. In addition, the long rated life of CFL Lamps means low maintenance requirements, further reducing the total cost of ownership.

Our attractive range of CFL products includes energy saving Watt-Miser™ Lamps and the low maintenance, extended life LongLast™ range. Whichever you choose, these lamps offer a versatile, high quality solution when space is at a premium, with market-leading life performance and impressive levels of energy efficiency.

- Wide range of colour and wattage (2700 – 6500K, 5 – 70W)
- Dimmability for further cost/energy savings
- Motion detection available with selected drivers
- Wide choice of models for different applications



LONG LIFE



REDUCED MAINTENANCE COSTS



REDUCED CO<sub>2</sub> EMISSION

**WattMiser™**

## CFL Watt-Miser™ Lamps

- 2D™ Watt-Miser™ Lamps are direct replacements for standard 2D™ lamps (16/21/28/38W)
- Compatible with existing control gear for additional energy saving
- 2D shape suitable for broad range of applications – ideal for circular light distribution
- 'A' class energy rating – 5 – 12% extra energy saving
- Market leading life performance up to 15 000 hours

Application areas:

- Residential
- Domestic
- Hotels/motels/restaurants
- Utility areas
- Task lighting
- Emergency lighting

**LongLast™**

## CFL LongLast™ Lamps

- Long service life up to 20 000 hours for significantly reduced replacement and maintenance costs
- Double, triple and quad tube (D/E, T/E, Q/E) options
- Ideal light source for small fixtures and downlighters
- Recommended control gear list and additional technical details (data sheets) at [www.gelighting.com/eu](http://www.gelighting.com/eu)

Application areas:

- Downlighting
- Corridor lighting
- Office buildings
- Hotels/motels
- Restaurants
- Retail

CFL Non-Integrated

CFL Non-Integrated



# Compact Fluorescent Lamps Non-Integrated

## Product overview



**Biax™ S – 2-pin**  
 Cap: G23  
 Wattages: 5-7-9-11W  
 Colours: 2700 – 6500K  
 Rated life: 10 000 h



**Biax™ S/E – 4-pin**  
 Cap: 2G7  
 Wattages: 5-7-9-11W  
 Colours: 2700 – 6500K  
 Rated life: 10 000 h  
 11W version available in Red/  
 Green/Blue colours.

Biax™ S



CFL Non-Integrated

CFL Non-Integrated



**Biax™ D – 2-pin**  
 Cap: G24d  
 Wattages: 10-13-18-26W  
 Colours: 2700 – 6500K  
 Rated life: 12 000 h



**LongLast™**  
**Biax™ D/E – 4-pin**  
 Cap: G24q  
 Wattage: 10-13-18-26W  
 Colours: 2700 – 6500K  
 Rated life: 20 000 h

Biax™ D



**LongLast™**  
**Biax™ Q/E – 4-pin**  
 Cap: GX24q  
 Wattages: 57 – 70W  
 Colours: 2700 – 4000K  
 Rated life: 20 000 h

Biax™ Q



**LongLast™**  
**Biax™ L – 4-pin**  
 Cap: 2G11  
 Wattages: 18 – 55W  
 Colours: 2700 – 6500K  
 Rated life: 15 000 – 22 500 h

Biax™ L



**LongLast™**  
**Biax™ T – 2-pin**  
 Cap: GX24d  
 Wattages: 13-18-26W  
 Colours: 2700 – 4000K  
 Rated life: 12 000 h



**LongLast™**  
**Biax™ T/E – 4-pin**  
 Cap: GX24q  
 Wattages: 13-18-26-32-42W  
 Colours: 2700 – 4000K  
 Rated life: 12 000 – 20 000 h

Biax™ T



**WattMiser™**  
**2D™ Watt-Miser™**  
 Cap: GR8, GR10q  
 Wattages: 16 – 38W  
 Colours: 2700 – 6000K  
 Rated life: 12 000 – 15 000 h



**Biax 2D™**  
 Cap: GR10q-3  
 Wattages: 55W  
 Colours: 2700 – 3500K  
 Rated life: 10 000 h



**WattMiser™**  
**Biax™ 2D™ Integral**  
 Cap: GR210d  
 Wattages: 18W  
 Colours: 3500K  
 Rated life: 10 000 h

2D™

# Compact Fluorescent Lamps Non-Integrated

# Compact Fluorescent Lamps Non-Integrated


Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ S 2-pin, Internal Starter</b>														
1	5	35	G23	F5BX/SPX27/827	37654	265	2700	82	10 000	32	107.5	7.2	B	10
1	5	35	G23	F5BX/SPX41/840	37661	265	4000	82	10 000	32	107.5	7.2	B	10
1	7	47	G23	F7BX/SPX27/827	37846	425	2700	82	10 000	32	136.5	9.2	A	10
1	7	47	G23	F7BX/830	38930	425	3000	82	10 000	32	136.5	9.2	A	10
1	7	47	G23	F7BX/SPX35/835	37659	425	3500	82	10 000	32	136.5	9.2	A	10
1	7	47	G23	F7BX/SPX41/840	37660	425	4000	82	10 000	32	136.5	9.2	A	10
1	7	47	G23	F7BX/865	38984	425	6500	82	10 000	32	136.5	9.2	A	10
1	9	60	G23	F9BX/827	37651	600	2700	82	10 000	32	167	11.1	A	10
1	9	60	G23	F9BX/830	38929	600	3000	82	10 000	32	167	11.1	A	10
1	9	60	G23	F9BX/SPX35/835	37652	600	3500	82	10 000	32	167	11.1	A	10
1	9	60	G23	F9BX/SPX41/840	37653	600	4000	82	10 000	32	167	11.1	A	10
1	9	60	G23	F9BX/865	38985	600	6500	82	10 000	32	167	11.1	A	10
1	11	91	G23	F11BX/827	37663	900	2700	82	10 000	32	237	14.7	A	10
1	11	91	G23	F11BX/830	38928	900	3000	82	10 000	32	237	14.7	A	10
1	11	91	G23	F11BX/835	37666	900	3500	82	10 000	32	237	14.7	A	10
1	11	91	G23	F11BX/840	37664	900	4000	82	10 000	32	237	14.7	A	10
1	11	91	G23	F11BX/865	38986	900	6500	82	10 000	32	237	14.7	A	10

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ S/E 4-pin, External Starter Required</b>														
2	5	35	2G7	F5BX/827/4P	37714	265	2700	82	15 000*	37.5	92	5.5	A	10
2	5	35	2G7	F5BX/840/4P	37715	265	4000	82	15 000*	37.5	92	5.5	A	10
2	7	47	2G7	F7BX/827/4P	37658	425	2700	82	15 000*	37.5	121	7.2	A	10
2	7	47	2G7	F7BX/840/4P	37716	425	4000	82	15 000*	37.5	121	7.2	A	10
2	9	60	2G7	F9BX/827/4P	37710	600	2700	82	15 000*	37.5	151	8.8	A+	10
2	9	60	2G7	F9BX/830/4P	97926	600	3000	82	15 000*	37.5	151	8.8	A+	10
2	9	60	2G7	F9BX/840/4P	37711	600	4000	82	15 000*	37.5	151	8.8	A+	10
2	11	91	2G7	F11BX/827/4P	37717	900	2700	82	15 000*	37.5	222	12.1	A+	10
2	11	91	2G7	F11BX/830/4P	97925	900	3000	82	15 000*	37.5	222	12.1	A+	10
2	11	91	2G7	F11BX/840/4P	37713	900	4000	82	15 000*	37.5	222	12.1	A+	10
2	11	91	2G7	F11BX/865/4P	12603	900	6500	82	15 000*	37.5	222	12.1	A+	10
2	11	91	2G7	F11BX/GREEN/2G7	98311	1200	GREEN	N/A	15 000*	37.5	222	N/A	N/A	10
2	11	91	2G7	F11BX/BLUE/2G7	98313	250	BLUE	N/A	15 000*	37.5	222	N/A	N/A	10
2	11	91	2G7	F11BX/RED/2G7	98314	600	RED	N/A	15 000*	37.5	222	N/A	N/A	10

\* Life on electronic gear 12h-cycle

### Product Description - explanation

For further information check the glossary

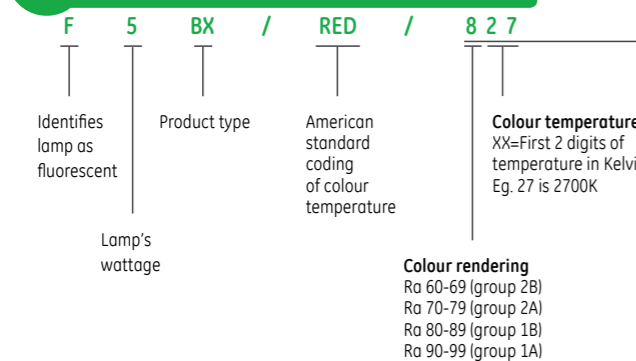

**Colour definition**  
827=Extra Warm White  
830=Warm White  
835=White  
840=Cool White  
865=Daylight

**Colour rendering**  
Ra 60-69 (group 2B)  
Ra 70-79 (group 2A)  
Ra 80-89 (group 1B)  
Ra 90-99 (group 1A)



1 2

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ D 2-pin, Internal Starter</b>														
3	10	64	G24D-1	F10DBX/T4/827/2P	70248	600	2700	82	12 000	34.4	108.5	12.7	B	10
3	10	64	G24D-1	F10DBX/T4/830/2P	70258	600	3000	82	12 000	34.4	108.5	12.7	B	10
3	10	64	G24D-1	F10DBX/T4/840/2P	70265	600	4000	82	12 000	34.4	108.5	12.7	B	10
3	10	64	G24D-1	F10DBX/T4/865/2P	70268	600	6500	82	12 000	34.4	108.5	12.7	B	10
3	10	64	G24D-1	F10DBX/T3/827/2P	78211*	600	2700	82	12 000	34.4	108	12.7	B	10
3	10	64	G24D-1	F10DBX/T3/840/2P	78214*	600	4000	82	12 000	34.4	108	12.7	B	10
3	10	64	G24D-1	F10DBX/T3/865/2P	78215*	600	6500	82	12 000	34.4	108	12.7	B	10
3	13	91	G24D-1	F13DBX/T4/827/2P	70561	900	2700	82	12 000	34.4	133	16.2	A	10
3	13	91	G24D-1	F13DBX/T4/830/2P	70572	900	3000	82	12 000	34.4	133	16.2	A	10
3	13	91	G24D-1	F13DBX/T4/840/2P	70573	900	4000	82	12 000	34.4	133	16.2	A	10
3	13	91	G24D-1	F13DBX/T4/865/2P	70574	900	6500	82	12 000	34.4	133	16.2	A	10
3	13	91	G24D-1	F13DBX/T3/827/2P	78221*	900	2700	82	12 000	34.4	139	16.2	A	10
3	13	91	G24D-1	F13DBX/T3/830/2P	78222*	900	3000	82	12 000	34.4	139	16.2	A	10
3	13	91	G24D-1	F13DBX/T3/835/2P	78223**	900	3500	82	12 000	34.4	139	16.2	A	10
3	13	91	G24D-1	F13DBX/T3/840/2P	78224*	900	4000	82	12 000	34.4	139	16.2	A	10
3	18	100	G24d-2	F18DBXT4/SPX27/827	12860	1200	2700	82	12 000	34.4	154	22.1	B	10
3	18	100	G24d-2	F18DBXT4/SPX30/830	12861	1200	3000	82	12 000	34.4	154	22.1	B	10
3	18	100	G24d-2	F18DBXT4/SPX35/835	12863	1200	3500	82	12 000	34.4	154	22.1	B	10
3	18	100	G24d-2	F18DBXT4/SPX41/840	12864	1200	4000	82	12 000	34.4	154	22.1	B	10
3	18	100	G24d-2	F18DBXT4/SPX65/865	13017	1200	6500	82	12 000	34.4	154	22.1	B	10
3	26	105	G24d-3	F26DBXT4/SPX27/827	35250	1800	2700	82	12 000	34.4	169.5	31.4	B	10
3	26	105	G24d-3	F26DBXT4/SPX30/830	35237	1800	3000	82	12 000	34.4	169.5	31.4	B	10
3	26	105	G24d-3	F26DBXT4/SPX35/835	35251	1800	3500	82	12 000	34.4	169.5	31.4	B	10
3	26	105	G24d-3	F26DBXT4/SPX41/840	35252	1800	4000	82	12 000	34.4	169.5	31.4	B	10
3	26	105	G24d-3	F26DBXT4/SPX65/865	35305	1710	6500	82	12 000	34.4	169.5	31.5	B	10

\* Will be phased out, change from T3 to T4

\*\* Will be phased out with no direct substitute

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ D/E LongLast™ 4-pin, External Starter Required</b>														
4	10	64	G24q-1	F10DBX/T4/827/4P	70553	600	2700	82	20 000**	34.4	101	10.5	A	10
4	10	64	G24q-1	F10DBX/T4/830/4P	70555	600	3000	82	20 000**	34.4	101	10.5	A	10
4	10	64	G24q-1	F10DBX/T4/840/4P	70560	600	4000	82	20 000**	34.4	101	10.5	A	10
4	10	64	G24q-1	F10DBX/T3/827/4P	78217*	600	2700	82	20 000**	34.4	100.5	10.5	A	10
4	10	64	G24q-1	F10DBX/T3/830/4P	78218*	600	3000	82	20 000**	34.4	100.5	10.5	A	10
4	13	91	G24q-1	F13DBX/T4/827/4P	70580	900	2700	82	20 000**	34.4	125.5	13.8	A	10
4	13	91	G24q-1	F13DBX/T4/830/4P	70583	900	3000	82	20 000**	34.4	125.5	13.8	A	10
4	13	91	G24q-1	F13DBX/T4/840/4P	70584	900	4000	82	20 000**	34.4	125.5	13.8	A	10
4	13	91	G24q-1	F13DBX/T4/865/4P	70587	900	6500	82	20 000**	34.4	125.5	13.8	A	10

\* Will be phased out, change from T3 to T4

\*\* Life on electronic gear 12h-cycle



3 4

# Compact Fluorescent Lamps Non-Integrated

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ D/E LongLast™ 4-pin, External Starter Required</b>														
1	18	100	G24q-2	F18DBX/SPX27/827/4P	12865	1200	2700	82	20 000*	34.4	146.5	18.2	A	10
1	18	100	G24q-2	F18DBX/SPX30/830/4P	12866	1200	3000	82	20 000*	34.4	146.5	18.2	A	10
1	18	100	G24q-2	F18DBX/SPX35/835/4P	12869	1200	3500	82	20 000*	34.4	146.5	18.2	A	10
1	18	100	G24q-2	F18DBX/SPX41/840/4P	12870	1200	4000	82	20 000*	34.4	146.5	18.2	A	10
1	26	105	G24q-3	F26DBX/SPX27/827/4P	35247	1800	2700	82	20 000*	34.4	162	26.4	A	10
1	26	105	G24q-3	F26DBX/SPX30/830/4P	35235	1800	3000	82	20 000*	34.4	162	26.4	A	10
1	26	105	G24q-3	F26DBX/SPX35/835/4P	35248	1800	3500	82	20 000*	34.4	162	26.4	A	10
1	26	105	G24q-3	F26DBX/SPX41/840/4P	35236	1800	4000	82	20 000*	34.4	162	26.4	A	10
1	26	105	G24q-3	F26DBX/SPX65/865/4P	42798	1710	6500	82	20 000*	34.4	162	26.4	A	10

\* Life on electronic gear 12h-cycle

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ T 2-pin with Amalgam, Internal Starter</b>														
2	13	91	GX24d-1	F13TBX/827/A/2P	35940	900	2700	82	12 000	49.3	112.9	16.2	B	10
2	13	91	GX24d-1	F13TBX/SPX30/830/A/2P	35966	900	3000	82	12 000	49.3	112.9	16.2	B	10
2	13	91	GX24d-1	F13TBX/SPX41/A/2P	35941	900	4000	82	12 000	49.3	112.9	16.2	B	10
2	18	100	GX24d-2	F18TBX/SPX27/827/A/2P	35945	1200	2700	82	12 000	49.3	127.4	22.1	B	10
2	18	100	GX24d-2	F18TBX/SPX30/830/A/2P	35944	1200	3000	82	12 000	49.3	127.4	22.1	B	10
2	18	100	GX24d-2	F18TBX/SPX41/840/A/2P	35939	1200	4000	82	12 000	49.3	127.4	22.1	B	10
2	26	105	GX24d-3	F26TBX/SPX27/827/A/2P	35959	1800	2700	82	12 000	49.3	139.9	32.8	B	10
2	26	105	GX24d-3	F26TBX/SPX30/830/A/2P	35952	1800	3000	82	12 000	49.3	139.9	32.8	B	10
2	26	105	GX24d-3	F26TBX/SPX41/840/A/2P	35964	1800	4000	82	12 000	49.3	139.9	32.8	B	10

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ T/E LongLast™ 4-pin with Amalgam, External Starter Required</b>														
3	13	91	GX24q-1	F13TBX/SPX27/827/A/4P	34391	900	2700	82	20 000**	49.3	106.2	13.8	A	10
3	13	91	GX24q-1	F13TBX/SPX30/830/A/4P	34395	900	3000	82	20 000**	49.3	106.2	13.8	A	10
3	13	91	GX24q-1	F13TBX/SPX35/835/A/4P	34400	900	3500	82	20 000**	49.3	106.2	13.8	A	10
3	13	91	GX24q-1	F13TBX/SPX41/840/A/4P	34387	900	4000	82	20 000**	49.3	106.2	13.8	A	10
3	18	100	GX24q-2	F18TBX/SPX27/827/A/4P	34392	1200	2700	82	20 000**	49.3	120.7	18.2	A	10
3	18	100	GX24q-2	F18TBX/SPX30/830/A/4P	34396	1200	3000	82	20 000**	49.3	120.7	18.2	A	10
3	18	100	GX24q-2	F18TBX/SPX35/835/A/4P	34405	1200	3500	82	20 000**	49.3	120.7	18.2	A	10
3	18	100	GX24q-2	F18TBX/SPX41/840/A/4P	34385	1200	4000	82	20 000**	49.3	120.7	18.2	A	10
3	26	105	GX24q-3	F26TBX/SPX27/827/A/4P	34393	1800	2700	82	20 000**	49.3	133.2	26.4	A	10
3	26	105	GX24q-3	F26TBX/SPX30/830/A/4P	34397	1800	3000	82	20 000**	49.3	133.2	26.4	A	10
3	26	105	GX24q-3	F26TBX/SPX35/835/A/4P	34406	1800	3500	82	20 000**	49.3	133.2	26.4	A	10
3	26	105	GX24q-3	F26TBX/SPX41/840/A/4P	34381	1800	4000	82	20 000**	49.3	133.2	26.4	A	10

\*\*Life on electronic gear 12h-cycle



# Compact Fluorescent Lamps Non-Integrated

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ T/E LongLast™ 4-pin with Amalgam, External Starter Required with HF gear*</b>														
4	32	100	GX24q-3	F32TBX/SPX27/827/AP4P	94520	2400	2700	82	20 000**	49.3	146.2	35.2	A	10
4	32	100	GX24q-3	F32TBX/SPX30/830/AP4P	94521	2400	3000	82	20 000**	49.3	146.2	35.2	A	10
4	32	100	GX24q-3	F32TBX/SPX35/835/A/4P	94522	2400	3500	82	20 000**	49.3	146.2	35.2	A	10
4	32	100	GX24q-3	F32TBX/SPX41/840/A/4P	94523	2400	4000	82	20 000**	49.3	146.2	35.2	A	10
4	42	135	GX24q-4	F42TBX/827/A/4P	46312	3200	2700	82	20 000**	49.3	163.2	47.3	A	10
4	42	135	GX24q-4	F42TBX/830/A/4P	46313	3200	3000	82	20 000**	49.3	163.2	47.3	A	10
4	42	135	GX24q-4	F42TBX/835/A/4P	46314	3200	3500	82	20 000**	49.3	163.2	47.3	A	10
4	42	135	GX24q-4	F42TBX/841/A/4P	46315	3200	4000	82	20 000**	49.3	163.2	47.3	A	10

\* Life test: if HF gear used with 12h cycling, otherwise with 3h cycling

\*\*Life on electronic gear 12h-cycle

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ Q/E LongLast™ 4-pin with Amalgam, External Starter Required with HF gear*</b>														
5	57	175	GX24q-5	F57QBX/827/A/4P/LL	45213 ***	4300	2700	82	20 000**	58.3	180.7	61.6	A	10
5	57	175	GX24q-5	F57QBX/830/A/4P/LL	45204 ***	4300	3000	82	20 000**	58.3	180.7	61.6	A	10
5	57	175	GX24q-5	F57QBX/835/A/4P/LL	45202 ***	4300	3500	82	20 000**	58.3	180.7	61.6	A	10
5	57	175	GX24q-5	F57QBX/840/A/4P/LL	45201 ***	4300	4000	82	20 000**	58.3	180.7	61.6	A	10
5	70	219	GX24q-6	F70QBX/830/A/4P/LL	45208 ***	5200	3000	82	20 000**	58.3	208.2	77	A	10
5	70	219	GX24q-6	F70QBX/835/A/4P/LL	45219 ***	5200	3500	82	20 000**	58.3	208.2	77	A	10
5	70	219	GX24q-6	F70QBX/840/A/4P/LL	45218 ***	5200	4000	82	20 000**	58.3	208.2	77	A	10

\* Life test: if HF gear used with 12h cycling, otherwise with 3h cycling

\*\* Life on electronic gear 12h-cycle

\*\*\* Whole range will be phased out

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™L LongLast™4-pin, External Starter Required with HF gear*</b>														
6	40	126	2G11	F40BX/830	41171	3500	3000	82	22 500*	43.8	538.8	44	A	25
6	40	126	2G11	F40BX/835	41172	3500	3500	82	22 500*	43.8	538.8	44	A	25
6	40	126	2G11	F40BX/840	41173	3500	4000	82	22 500*	43.8	538.8	44	A	25
6	55	101	2G11	F55BX/830	41174	4800	3000	82	22 500*	43.8	538.8	60.5	A	25
6	55	101	2G11	F55BX/835	41260	4800	3500	82	22 500*	43.8	538.8	60.5	A	25
6	55	101	2G11	F55BX/840	41298	4800	4000	82	22 500*	43.8	538.8	60.5	A	25
6	55	101	2G11	F55BX/865	75695	4550	6500	82	22 500*	43.8	538.8	60.5	A	25

\* Life test: if HF gear used with 12h cycling, otherwise with 3h cycling



# Compact Fluorescent Lamps Non-Integrated

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty
<b>Biax™ L 4-pin, External Starter Required</b>														
1	18	58	2G11	F18BX/827	41087	1 250	2700	82	15 000*	43.8	231.3	17.6	A	25
1	18	58	2G11	F18BX/830	41088	1 250	3000	82	15 000*	43.8	231.3	17.6	A	25
1	18	58	2G11	F18BX/835	41089	1 250	3500	82	15 000*	43.8	231.3	17.6	A	25
1	18	58	2G11	F18BX/840	41090	1 250	4000	82	15 000*	43.8	231.3	17.6	A	25
1	24	87	2G11	F24BX/827	41128	1 800	2700	82	15 000*	43.8	326.8	24.2	A	25
1	24	87	2G11	F24BX/830	41134	1 800	3000	82	15 000*	43.8	326.8	24.2	A	25
1	24	87	2G11	F24BX/835	41145	1 800	3500	82	15 000*	43.8	326.8	24.2	A	25
1	24	87	2G11	F24BX/840	41155	1 800	4000	82	15 000*	43.8	326.8	24.2	A	25
1	34	120	2G11	F34BX/830	41163	2 800	3000	82	15 000*	43.8	538.8	33	A+	25
1	34	120	2G11	F34BX/835	41166	2 800	3500	82	15 000*	43.8	538.8	33	A+	25
1	34	120	2G11	F34BX/840	41167	2 800	4000	82	15 000*	43.8	538.8	33	A+	25
1	36	106	2G11	F36BX/827	41307	2 900	2700	82	15 000*	43.8	421.8	36.6	A+	25
1	36	106	2G11	F36BX/830	41168	2 900	3000	82	15 000*	43.8	421.8	36.6	A+	25
1	36	106	2G11	F36BX/835	41169	2 900	3500	82	15 000*	43.8	421.8	36.6	A+	25
1	36	106	2G11	F36BX/840	41170	2 900	4000	82	15 000*	43.8	421.8	36.6	A+	25
1	36	106	2G11	F36BX/865	75694	2 750	6500	82	15 000*	43.8	421.8	36.6	A	25

\* Life on electronic gear 12h-cycle

<b>2D™ Watt-Miser™</b>														
2	16	103	GR8	F162D/835	41745*	1 100	3500	82	12 000	138	142	18.8	A	20
2	16	103	GR10q	F162D/827/4P	41746*	1 100	2700	82	12 000	138	142	15.4	A	20
2	16	103	GR10q	F162D/835/4P	41747*	1 100	3500	82	12 000	138	142	15.4	A	20
2	16	103	GR8	F162D/T4/827/2P GE HB 1/10 WM	85135	1 100	2700	82	12 000	138	142	18.8	A	10
2	16	103	GR8	F162D/T4/835/2P GE HB 1/10 WM	85138	1 100	3500	82	12 000	138	142	18.8	A	10
2	16	103	GR10q	F162D/T4/827/4P GE HB 1/10 WM	85141	1 100	2700	82	12 000	138	142	15.4	A	10
2	16	103	GR10q	F162D/T4/835/4P GE HB 1/10 WM	85142	1 100	3500	82	12 000	138	142	15.4	A	10
2	16	103	GR8	F162D/T4/860/2P GE HB 1/10 WM	85140	1 050	6000	82	12 000	138	142	18.8	A	10
2	21	103	GR10q	F212D/827/4P	41794*	1 375	2700	82	12 000	138	142	20.9	A	20
2	21	103	GR10q	F212D/835/4P	41806*	1 375	3500	82	12 000	138	142	20.9	A	20
2	21	103	GR10q	F212D/860/4P	41808*	1 305	6000	82	12 000	138	142	20.9	A	20
2	21	103	GR10q	F212D/T4/827/4P GE HB 1/10 WM	85143	1 375	2700	82	12 000	138	142	20.9	A	10
2	21	103	GR10q	F212D/T4/835/4P GE HB 1/10 WM	85144	1 375	3500	82	12 000	138	142	20.9	A	10
2	21	103	GR10q	F212D/T4/860/4P GE HB 1/10 WM	85145	1 305	6000	82	12 000	138	142	20.9	A	10
2	28	108	GR8	F282DT5/827/2P	10546*	2 150	2700	82	15 000	202	204	31.8	A	20
2	28	108	GR10q	F282DT5/827/4P	10547*	2 150	2700	82	15 000	202	204	27	A	20
2	28	108	GR10q	F282DT5/835/4P	10567*	2 150	3500	82	15 000	202	204	27	A	20
2	28	108	GR10q	F282DT5/840/4P	10548*	2 150	4000	82	15 000	202	204	27	A	20

\* Will be phased out without direct substitute



1 2

# Compact Fluorescent Lamps Non-Integrated



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	Energy Consumption (kWh)	EEC	Pack Qty	Model
<b>2D™ Watt-Miser™</b>														
28	108	GR8	F282D/T5/827/2P GE HB 1/10 WM	85109	2 150	2700	82	15 000	202	204	31.8	A	20	2
28	108	GR10q	F282D/T5/827/4P GE HB 1/10 WM	85118	2 150	2700	82	15 000	202	204	27	A	20	2
28	108	GR10q	F282D/T5/830/4P GE HB 1/10 WM	85120	2 150	3000	82	15 000	202	204	27	A	20	2
28	108	GR10q	F282D/T5/835/4P GE HB 1/10 WM	85130	2 150	3500	82	15 000	202	204	27	A	20	2
28	108	GR10q	F282D/T5/840/4P GE HB 1/10 WM	85132	2 150	4000	82	15 000	202	204	27	A	20	2
38	110	GR10q	F382DT5/827/4P	10550*	3 020	2700	82	15 000	202	204	38	A	20	2
38	110	GR10q	F382DT5/835/4P	10566*	3 020	3500	82	15 000	202	204	38	A	20	2
38	110	GR10q	F382D/T5/827/4P GE HB 1/10 WM	85133	3 020	2700	82	15 000	202	204	38	A	10	2
38	110	GR10q	F382D/T5/835/4P GE HB 1/10 WM	85134	3 020	3500	82	15 000	202	204	38	A	10	2
38	110	GR10q	F382D/T5/860/4P LEG HB 1/10 WM	85151	2 860	6000	82	15 000	202	204	38	A	10	2

\* Will be phased out, pack change from blister to hanging box

<b>Biax™ 2D™</b>														
55	98	GR10q3	F552D/T5/827/4P A LEG HB 1/10	85148	3 900	2700	82	10 000	202	204	61.6	A	10	3
55	98	GR10q3	F552D/T5/830/4P A/T LEG HB 1/10	85149	3 900	3000	82	10 000	202	204	61.6	A	10	3
55	98	GR10q3	F552D/T5/835/4P A LEG HB 1/10	85150	3 900	3500	82	10 000	202	204	61.6	A	10	3
55	98	GR10q3	F552D/T5/830/4P	78339	3 900	3000	82	10 000	202	204	61.6	A	20	3

<b>Biax™ 2D™ Watt-Miser™ with Integral Control Gear</b>														
18	220-240	GRZ10d	FLE18W2D/835 GRZ10D	18123*	1 200	3500	82	10 000	138	142	16	A	10	4

\* Will be phased out without direct substitute



2 3 4



# Compact Fluorescent Lamps Non-Integrated

Brand cross reference

GE Lighting

Osram

Philips

Sylvania

Biax™ S 2-pin		Colour Temperature	Dulux S	Master PL-S 2	Lynx-S
5W	F5BX/827	2700	DULUX S 5W/827	PL-S 5W/827/2P	Lynx S 5W/827
	F5BX/840	4000	DULUX S 5W/840	—	Lynx S 5W/840
7W	F7BX/827	2700	DULUX S 7W/827	PL-S 7W/827/2P	Lynx S 7W/827
	F7BX/830	3000	DULUX S 7W/830	—	Lynx S 7W/830
	F7BX/835	3500	DULUX S 7W/835	—	—
	F7BX/840	4000	DULUX S 7W/840	PL-S 7W/840/2P	Lynx S 7W/840
	F7BX/865	6500	DULUX S 7W/865	—	—
9W	F9BX/827	2700	DULUX S 9W/827	PL-S 9W/827/2P	Lynx S 9W/827
	F9BX/830	3000	DULUX S 9W/830	PL-S 9W/830/2P	Lynx S 9W/830
	F9BX/835	3500	DULUX S 9W/835	—	—
	F9BX/840	4000	DULUX S 9W/840	PL-S 9W/840/2P	Lynx S 9W/840
	F9BX/865	6500	DULUX S 9W/865	—	—
11W	F11BX/827	2700	DULUX S 11W/827	PL-S 11W/827/2P	Lynx S 11W/827
	F11BX/830	3000	DULUX S 11W/830	—	Lynx S 11W/830
	F11BX/835	3500	—	—	—
	F11BX/840	4000	DULUX S 11W/840	PL-S 11W/840/2P	Lynx S 11W/840
	F11BX/865	6500	DULUX S 11W/865	—	—
	—	—	DULUX S 9W/Red	—	—
	—	—	DULUX S 9W/Green	—	—
—	—	DULUX S 9W/Blue	—	—	
Biax™ S/E 4-pin		Colour Temperature	Dulux-SE	Master PL-S 4	Lynx — SE
5W	F5BX/827/4P	2700	—	PL-S 5W/827/4P	Lynx SE 5W/827
	F5BX/840/4P	4000	—	PL-S 5W/840/4P	Lynx SE 5W/840
7W	F7BX/827/4P	2700	DULUX S/E 7W/827	PL-S 7W/827/4P	Lynx SE 7W/827
	F7BX/840/4P	4000	DULUX S/E 7W/840	PL-S 7W/840/4P	Lynx SE 7W/840
9W	F9BX/827/4P	2700	DULUX S/E 9W/827	PL-S 9W/827/4P	Lynx SE 9W/827
	F9BX/830/4P	3000	DULUX S/E 9W/830	—	Lynx SE 9W/830
	F9BX/840/4P	4000	DULUX S/E 9W/840	PL-S 9W/840/4P	Lynx SE 9W/840
11W	F11BX/827/4P	2700	DULUX S/E 11W/827	PL-S 11W/827/4P	Lynx SE 11W/827
	F11BX/827/4P	3000	DULUX S/E 11W/830	—	Lynx SE 11W/830
	F11BX/840/4P	4000	DULUX S/E 11W/840	PL-S 11W/840/4P	Lynx SE 11W/840
	F11BX/865/4P	6500	—	—	—
	F11BX/Red	—	—	—	—
	F11BX/Green	—	—	—	—
	F11BX/Blue	—	—	—	—
Biax™ D 2-pin		Colour Temperature	Dulux-D	Master PL-C	Lynx-D
10W	F10DBX/827	2700	DULUX D 10W/827	PL-C 10W/827/2P	Lynx D 10W/827
	F10DBX/830	3000	DULUX D 10W/830	PL-C 10W/830/2P	Lynx D 10W/830
	F10DBX/840	4000	DULUX D 10W/840	PL-C 10W/840/2P	Lynx D 10W/840
	F10DBX/865	6500	DULUX D 10W/865	—	Lynx D 10W/865
13W	F13DBX/827	2700	DULUX D 13W/827	PL-C 13W/827/2P	Lynx D 13W/827
	F13DBX/830	3000	DULUX D 13W/830	PL-C 13W/830/2P	Lynx D 13W/830
	F13DBX/840	4000	DULUX D 13W/840	PL-C 13W/840/2P	Lynx D 13W/840
	F13DBX/865	6500	DULUX D 13W/865	—	Lynx D 13W/865
18W	F18DBX/827	2700	DULUX D 18W/827	PL-C 18W/827/2P	Lynx D 18W/827
	F18DBX/830	3000	DULUX D 18W/830	PL-C 18W/830/2P	Lynx D 18W/830
	F18DBX/835	3500	DULUX D 18W/835	—	Lynx D 18W/835
	F18DBX/840	4000	DULUX D 18W/840	PL-C 18W/840/2P	Lynx D 18W/840
	F18DBX/865	6500	DULUX D 18W/865	—	Lynx D 18W/865

# Compact Fluorescent Lamps Non-Integrated

Brand cross reference

GE Lighting

Osram

Philips

Sylvania

Biax™ D 2-pin		Colour Temperature	Dulux-D	Master PL-C	Lynx-D
26W	F26DBX/827	2700	DULUX D 26W/827	PL-C 26W/827/2P	Lynx D 26W/827
	F26DBX/830	3000	DULUX D 26W/830	PL-C 26W/830/2P	Lynx D 26W/830
26W	F26DBX/835	3500	DULUX D 26W/835	PL-C 26W/835/2P	Lynx D 26W/835
	F26DBXT4/SPX41/840	4000	DULUX D 26W/840	PL-C 26W/840/2P	Lynx D 26W/840
	F26DBXT4/SPX65/865	6500	DULUX D 26W/865	PL-C 26W/865/2P	Lynx D 26W/865
	—	—	—	—	—
Biax™ D/E 4-pin		Colour Temperature	Dulux-DE	Master PL-C	Lynx-DE
10W	F10DBX/827/4P/EOL	2700	DULUX D/E 10W/827	PL-C 10W/827/4P	Lynx DE 10W/827
	F10DBX/830/4P/EOL	3000	DULUX D/E 10W/830	PL-C 10W/830/4P	Lynx DE 10W/830
	F10DBX/840/4P/EOL	4000	DULUX D/E 10W/840	PL-C 10W/840/4P	Lynx DE 10W/840
13W	F13DBX/827/4P/EOL	2700	DULUX D/E 13W/827	PL-C 13W/827/4P	Lynx DE 13W/827
	F13DBX/830/4P/EOL	3000	DULUX D/E 13W/830	PL-C 13W/830/4P	Lynx DE 13W/830
	F13DBX/840/4P/EOL	4000	—	PL-C 13W/840/4P	Lynx DE 13W/840
18W	F18DBX/827/4P/EOL	2700	DULUX D/E 18W/827	PL-C 18W/827/4P	Lynx DE 18W/827
	F18DBX/830/4P/EOL	3000	DULUX D/E 18W/830	PL-C 18W/830/4P	Lynx DE 18W/830
	F18DBX/835/4P/EOL	3500	DULUX D/E 18W/835	—	Lynx DE 18W/835
	F18DBX/840/4P/EOL	4000	DULUX D/E 18W/840	PL-C 18W/840/4P	Lynx DE 18W/840
	F18DBX/865/4P/EOL	6500	DULUX D/E 18W/865	—	Lynx DE 18W/865
26W	F26DBX/827/4P/EOL	2700	DULUX D/E 26W/827	PL-C 26W/827/4P	Lynx DE 26W/827
	F26DBX/830/4P/EOL	3000	DULUX D/E 26W/830	PL-C 26W/830/4P	Lynx DE 26W/830
	F26DBX/835/4P/EOL	3500	DULUX D/E 26W/835	PL-C 26W/835/4P	Lynx DE 26W/835
	F26DBX/840/4P/EOL	4000	DULUX D/E 26W/840	PL-C 26W/840/4P	Lynx DE 26W/840
	F26DBX/865/4P/EOL	6500	DULUX D/E 26W/865	—	Lynx DE 26W/865
Biax™ T 2-pin		Colour Temperature	Dulux T Plus	Master PL-T	Lynx-T
13W	F13TBX/827/A/2P	2700	—	PL-T 13W/827/2P	—
	F13TBX/830/A/2P	3000	DULUX T 13W/830	PL-T 13W/830/2P	—
	F13TBX/840/A/2P	4000	DULUX T 13W/840	PL-T 13W/840/2P	—
18W	F18TBX/827/A/2P	2700	DULUX T 18W/827	PL-T 18W/827/2P	—
	F18TBX/830/A/2P	3000	DULUX T 18W/830	PL-T 18W/830/2P	Lynx T 18W/830
	F18TBX/840/A/2P	4000	DULUX T 18W/840	PL-T 18W/840/2P	Lynx T 18W/840
26W	F26TBX/827/A/2P	2700	DULUX T 26W/827	PL-T 26W/827/2P	—
	F26TBX/830/A/2P	3000	DULUX T 26W/830	PL-T 26W/830/2P	Lynx T 26W/830
	F26TBX/840/A/2P	4000	DULUX T 26W/840	PL-T 26W/840/2P	Lynx T 26W/840
Biax™ T/E 4-pin		Colour Temperature	Dulux T/E Plus	Master PL-T 4-pin	Lynx- TE
13W	F13TBX/827/A/4P/EOL	2700	DULUX T/E 13W/827	PL-T 13W/827/4P	—
	F13TBX/830/A/4P/EOL	3000	DULUX T/E 13W/830	PL-T 13W/830/4P	—
	F13TBX/835/A/4P/EOL	3500	—	—	—
18W	F18TBX/840/A/4P/EOL	4000	DULUX T/E 13W/840	PL-T 13W/840/4P	—
	F18TBX/827/A/4P/EOL	2700	DULUX T/E 18W/827	PL-T 18W/827/4P	—
	F18TBX/830/A/4P/EOL	3000	DULUX T/E 18W/830	PL-T 18W/830/4P	Lynx TE 18W/830
26W	F18TBX/835/A/4P/EOL	3500	—	—	—
	F18TBX/840/A/4P/EOL	4000	DULUX T/E 18W/840	PL-T 18W/840/4P	Lynx TE 18W/840
	F26TBX/827/A/4P/EOL	2700	DULUX T/E 26W/827	PL-T 26W/827/4P	—
	F26TBX/830/A/4P/EOL	3000	DULUX T/E 26W/830	PL-T 26W/830/4P	Lynx TE 26W/830
	F26TBX/835/A/4P/EOL	3500	—	—	—
32W	F26TBX/840/A/4P/EOL	4000	DULUX T/E 26W/840	PL-T 26W/840/4P	Lynx TE 26W/840
	F32TBX/827/A/4P/EOL	2700	DULUX T/E 32W/827	PL-T 32W/827/4P	—
	F32TBX/830/A/4P/EOL	3000	DULUX T/E 32W/830	PL-T 32W/830/4P	Lynx TE 32W/830
F32TBX/835/A/4P/EOL	3500	—	—	—	

CFL Non-Integrated

CFL Non-Integrated

# Compact Fluorescent Lamps Non-Integrated

Brand cross reference

GE Lighting

Osram

Philips

Sylvania

Biax™ T/E 4-pin		Colour Temperature	Dulux T/E Plus	Master PL-T 4p0in	Lynx- TE
	F32TBX/840/A/4P/EOL	4000	DULUX T/E 32W/840	PL-T 32W/840/4P	Lynx TE 32W/840
42W	F42TBX/827/A/4P/EOL	2700	DULUX T/E 42W/827	PL-T 42W/827/4P	—
	F42TBX/830/A/4P/EOL	3000	DULUX T/E 42W/830	PL-T 42W/830/4P	Lynx TE 42W/830
	F42TBX/841/A/4P/EOL	3500	—	—	—
	F42TBX/835/A/4P/EOL	4000	DULUX T/E 42W/840	PL-T 42W/830/4P	Lynx TE 42W/840
Biax™ Q/E 4-pin		Colour Temperature	Dulux T/E	PL-T	Lynx- TE t
57W	F57QBx/827/A/4P/EOL	2700	—	PL-T 57W/827/4P	—
	F57QBx/830/A/4P/EOL	3000	—	PL-T 57W/830/4P	—
	F57QBx/835/A/4P/EOL	3500	—	—	—
	F57QBx/840/A/4P/EOL	4000	—	PL-T 57W/840/4P	—
70W	F70QBx/830/A/4P/EOL	3000	—	—	—
	F70QBx/835/A/4P/EOL	3500	—	—	—
	F70QBx/840/A/4P/EOL	4000	—	—	—
Biax™ L 4-pin		Colour Temperature	Dulux-L	PL-L	Lynx L & Lynx-LE
18W	F18BX/827	2700	DULUX L 18W/827	—	Lynx L 18W/827
	F18BX/830	3000	DULUX L 18W/830	PL-L 18W/830/4P	Lynx L 18W/830
	F18BX/835	3500	DULUX L 18W/835	PL-L 18W/835/4P	—
	F18BX/840	4000	DULUX L 18W/840	PL-L 18W/840/4P	Lynx L 18W/840
24W	F24BX/827	2700	DULUX L 24W/827	—	Lynx L 24W/827
	F24BX/830	3000	DULUX L 24W/830	PL-L 24W/830/4P	Lynx L 24W/830
	F24BX/835	3500	DULUX L 24W/835	PL-L 24W/835/4P	—
	F24BX/840	4000	DULUX L 24W/840	PL-L 24W/840/4P	Lynx L 24W/840
34W	F34BX/830	3000	—	—	—
	F34BX/835	3500	—	—	—
	F34BX/840	4000	—	—	—
36W	F36BX/827	2700	DULUX L 36W/827	—	Lynx L 36W/827
	F36BX/830	3000	DULUX L 36W/830	PL-L 36W/830/4P	Lynx L 36W/830
	F36BX/835	3500	DULUX L 36W/835	—	—
	F36BX/840	4000	DULUX L 36W/840	PL-L 36W/840/4P	Lynx L 36W/840
40W	F36BX/865	6500	DULUX L 36W/865	PL-L 36W/865/4P	Lynx L 36W/865
	F40BX/830	3000	DULUX L 40W/830	PL-L 40W/830/4P	Lynx LE 40W/830
	F40BX/835	3500	DULUX L 40W/835	PL-L 40W/835/4P	Lynx LE 40W/835
55W	F40BX/840	4000	DULUX L 40W/840	PL-L 40W/840/4P	Lynx LE 40W/840
	F55BX/830	3000	DULUX L 55W/830	PL-L 55W/830/4P	Lynx LE 55W/830
	F55BX/835	3500	DULUX L 55W/835	PL-L 55W/835/4P	Lynx LE 55W/835
	F55BX/840	4000	DULUX L 55W/840	PL-L 55W/840/4P	Lynx LE 55W/840
	F55BX/854	6500	DULUX L 55W/865	PL-L 55W/865/4P	Lynx LE 55W/865

# Compact Fluorescent Lamps Non-Integrated

Brand cross reference

GE Lighting

Osram

Philips

Sylvania

Biax™ 2D 2-pin		Colour Temperature		PL-Q 2-pin	Lynx-Q (GR8 base) 2 pin
16W	F162D/T4/827/2P GE HB 1/10 WM	2700	CFL Square 16W/827	PLQ 16W/827/2P	Lynx-Q 16W/827/2P
	F162D/T4/835/2P GE HB 1/10 WM	3500	CFL Square 16W/835	PLQ 16W/835/2P	Lynx-Q 16W/835/2P
	F162D/T4/860/2P GE HB 1/10 WM	6000	—	—	—
28W	F282D/T5/827/2P GE HB 1/10 WM	2700	CFL Square 28W/827	—	—
Biax™ 2D 4-pin		Colour Temperature		PL-Q 4-pin	Lynx-QE 4 pin
10W	OT F10W/2D/827/4P GE BL 1/20	2700	—	—	—
	OT F10W/2D/835/4P GE BL 1/20	3500	—	—	—
16W	F162D/T4/827/4P GE HB 1/10 WM	2700	CFL Square 16W/827	PLQ 16W/827/4P	Lynx-QE 16W/827/4P
	F162D/T4/835/4P GE HB 1/10 WM	3500	CFL Square 16W/835	PLQ 16W/835/4P	Lynx-QE 16W/835/4P
21W	F212D/T4/827/4P GE HB 1/10 WM	2700	—	—	—
	F212D/T4/835/4P GE HB 1/10 WM	3500	—	—	—
28W	F212D/T4/860/4P GE HB 1/10 WM	6000	—	—	—
	F282D/T5/827/4P GE HB 1/10 WM	2700	CFL Square 28W/827	PLQ 28W/827/4P	Lynx-QE 28W/827/4P
	F282D/T5/830/4P GE HB 1/10 WM	3000	—	PLQ 28W/830/4P	---
	F282D/T5/835/4P GE HB 1/10 WM	3500	CFL Square 28W/835	PLQ 28W/835/4P	Lynx-QE 28W/835/4P
38W	F282D/T5/840/4P GE HB 1/10 WM	4000	—	PLQ 28W/840/4P	Lynx-QE 28W/840/4P
	F382D/T5/827/4P GE HB 1/10 WM	2700	CFL Square 38W/827	PLQ 38W/827/4P	Lynx-QE 38W/827/4P
	F382D/T5/835/4P GE HB 1/10 WM	3500	—	PLQ 38W/835/4P	Lynx-QE 38W/835/4P
55W	F382D/T5/860/4P LEG HB 1/10 WM	6000	—	—	—
	F552D/T5/827/4P A LEG HB 1/10	2700	—	—	—
	F552D/T5/830/4P A/T LEG HB 1/10	3000	—	—	—
	F552D/T5/835/4P A LEG HB 1/10	3500	—	—	—

