



CFL Integrated

CFL Integrated



Compact
Fluorescent Lamps
Integrated



Compact Fluorescent Lamps Integrated

High quality lighting
with reduced
energy bills

Compact Fluorescent Lamps (CFL) offer an attractive and versatile lighting solution with the added benefit of low energy consumption and a reduction in CO₂ emissions. CFLs also deliver a long rated life – up to 15 000 hours – resulting in a low total cost of ownership and reduced maintenance requirements compared with older technologies.

With a wide choice of sizes, shapes and caps, we offer an extremely versatile range of integrated Compact Fluorescent Lamps, one that combines impressive energy saving benefits with high quality lighting.

Integrated CFLs are suitable for a variety of applications – including the home, office, retail stores and hospitality – with outstanding light quality guaranteed throughout the life of the lamps.

Our ranges include products with colour temperatures from 2700 – 6500K, and are available in decor incandescent sizes and look-a-like shapes (e.g. Spiral T2, Stick T3), with both ES and BC caps.



LONG RATED LIFE FROM
6 000 TO 15 000 HOURS



UP TO 80%
ENERGY SAVINGS



REDUCED CO₂ EMISSIONS
VS. OLDER TECHNOLOGIES

These products offer an energy-saving alternative to incandescent bulbs across virtually all applications, with technological advances meaning they are now often even smaller than the lamps they replace.

- Long rated life from 6 000 to 15 000 hours
- Flicker free, instant on light with fast warm-up
- Environmentally friendly with low mercury content
- Special option – high switching cycles up to 100 000
- Up to 80% energy savings vs. traditional incandescent on our 'A' energy labeled products



GE Compact Fluorescent Lamps Integrated

Product overview



T3 Mini

Cap: E27, E14, B22
Wattages: 9 – 23W
Colours: 2700 – 6500K
Rated life: 10 000 h



T3 Mini Economy

Cap: E27, E14, B22
Wattages: 9 – 23W
Colours: 2700K
Rated life: 6 000 – 7 000 h

Stick



GLS T2/T3

Cap: E27, E14, B22
Wattages: 8 – 20W
Colours: 2700 – 4000K
Rated life: 6 000 – 8 000 h



Spherical T2

Cap: E27, E14, B22
Wattages: 5 – 7W
Colours: 2700 – 4000K
Rated life: 6 000 – 8 000 h



Candle T2/T3

Cap: E27, E14, B22
Wattages: 7 – 11W
Colours: 2700 – 4000K
Rated life: 6 000 – 8 000 h

Decor



LongLast™

LongLast™ Spiral T2

Cap: E27, B22
Wattages: 8 – 23W
Colours: 2700 – 4000K
Rated life: 15 000 h



Spiral T2

Cap: E27, E14, B22
Wattages: 8 – 23W
Colours: 2700 – 6500K
Rated life: 8 000 – 10 000 h



Globe T3

Cap: E27
Wattages: 20 – 23W
Colours: 2700 – 4000K
Rated life: 8 000 h

Globe



Spiral T3

Cap: E27
Wattages: 11 – 20W
Colours: 2700 – 6500K
Rated life: 8 000 h



Spiral T4 High Power Factor (HPF)

Cap: E27
Wattages: 32W
Colours: 2700 – 6500K
Rated life: 10 000 h


Spiral



Genura

Cap: E27
Wattages: 23W
Colours: 2700 – 3000K
Rated life: 15 000 h

Reflector

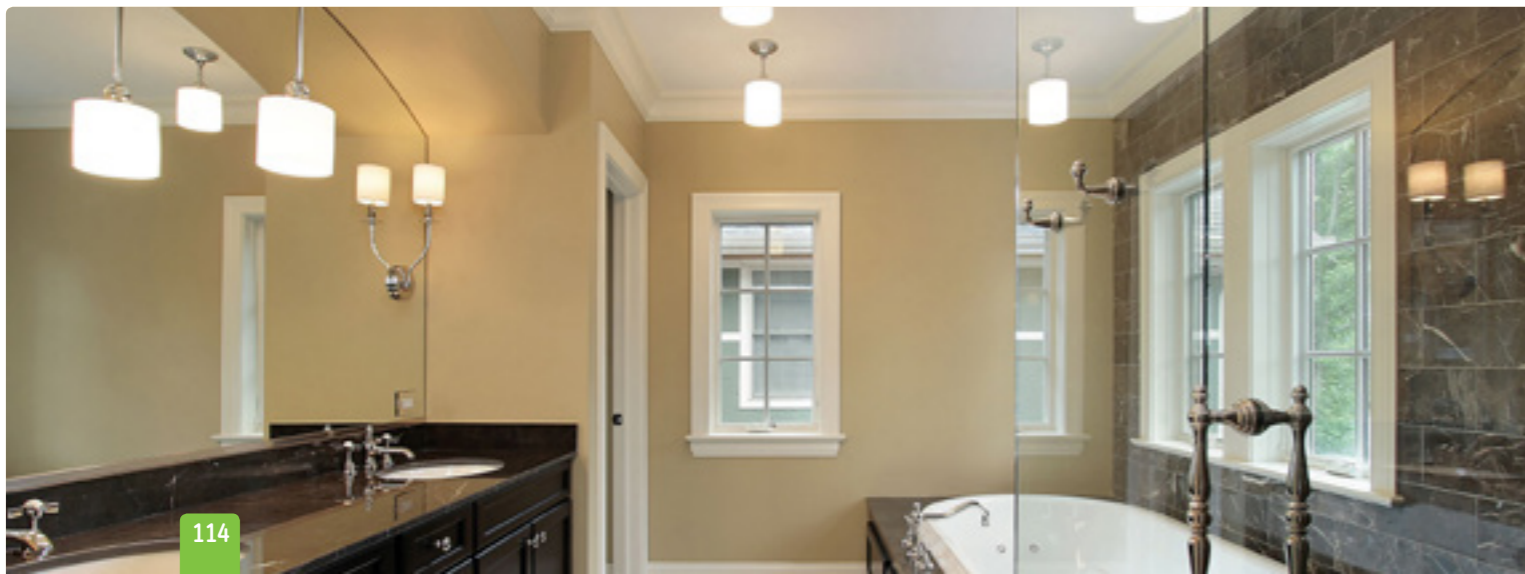

Compact Fluorescent Lamps Integrated

Compact Fluorescent Lamps Integrated


Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
Stick T3 Mini - 10 000 hours														
1	9	220-240	B22	FLE9TBX/T3/827/B22	71100	470	2700	82	10 000	110	45	9	A	8
2	9	220-240	E27	FLE9TBX/T3/827/E27	71297	470	2700	82	10 000	111	45	9	A	8
3	9	220-240	E14	FLE9TBX/T3/827/E14	71298*	470	2700	82	10 000	120	45	9	A	8
2	9	220-240	E27	FLE9TBX/T3/840/E27	71299	470	4000	82	10 000	111	45	9	A	10
2	9	220-240	E27	FLE9TBX/T3/865/E27	71300*	450	6500	82	10 000	111	45	9	A	10
3	9	220-240	E14	FLE9TBX/T3/865/E14	71382*	450	6500	82	10 000	120	45	9	A	10
2	11	220-240	E27	FLE11TBX/T3/827/E27	71117	590	2700	82	10 000	123	45	11	A	8
1	11	220-240	B22	FLE11TBX/T3/827/B22	71118	590	2700	82	10 000	122	45	11	A	8
3	11	220-240	E14	FLE11TBX/T3/827/E14	71296	590	2700	82	10 000	132	45	11	A	8
2	11	220-240	E27	FLE11TBX/T3/840/E27	71500	590	4000	82	10 000	123	45	11	A	10
2	11	220-240	E27	FLE11TBX/T3/865/E27	71125	560	6500	82	10 000	123	45	11	A	8
3	11	220-240	E14	FLE11TBX/T3/865/E14	71501	560	6500	82	10 000	132	45	11	A	10
3	11	220-240	E14	FLE11TBX/T3/827/E14	89864*	590	2700	82	10 000	132	45	11	A	10
4	15	220-240	E27	FLE15TBX/T3/827/E27	89863*	850	2700	82	10 000	134	45	14	A	10
4	15	220-240	E27	FLE15TBX/T3/827/E27	71116	850	2700	82	10 000	134	45	14	A	8
4	15	220-240	E27	FLE15TBX/T3/840/E27	72375	850	4000	82	10 000	134	45	14	A	10
4	15	220-240	E27	FLE15TBX/T3/865/E27	72376	810	6500	82	10 000	134	45	15	A	10
5	20	220-240	E27	FLE20TBX/T3/827/E27	72379	1 185	2700	82	10 000	146	45	18	A	8
6	20	220-240	B22	FLE20TBX/T3/827/B22	72380	1 185	2700	82	10 000	145	45	18	A	8
5	20	220-240	E27	FLE20TBX/T3/840/E27	72381	1 155	4000	82	10 000	146	45	18	A	10
5	20	220-240	E27	FLE20TBX/T3/865/E27	72382	1 155	6500	82	10 000	146	45	18	A	10
7	23	220-240	B22	FLE23QBX/T3/827/B22	71119*	1 400	2700	82	10 000	152	51	22	A	8
8	23	220-240	E27	FLE23QBX/T3/827/E27	71124	1 400	2700	82	10 000	153	51	22	A	8
8	23	220-240	E27	FLE23QBX/T3/840/E27	72383	1 400	4000	82	10 000	153	51	22	A	8

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
Stick T3 Mini Economy - 7 000 hours														
9	11	220-240	E27	FLE11DBX/T3/827/E27	75474*	600	2700	82	7 000	142	45	10	A	10
9	11	220-240	E27	FLE11DBX/T3/827/E27	14101*	600	2700	82	7 000	142	45	10	A	18
10	15	220-240	E27	FLE15TBX/T3/827/E27	71108	820	2700	82	7 000	136	45	14	A	10
11	20	220-240	E27	FLE20TBX/T3/827/E27	34133*	1 152	2700	82	7 000	154	45	19	A	18
10	20	220-240	E27	FLE20TBX/T3/827/E27	71115	1 152	2700	82	7 000	154	45	19	A	10

* Will be phased out

Product Description - explanation

For further information check the glossary

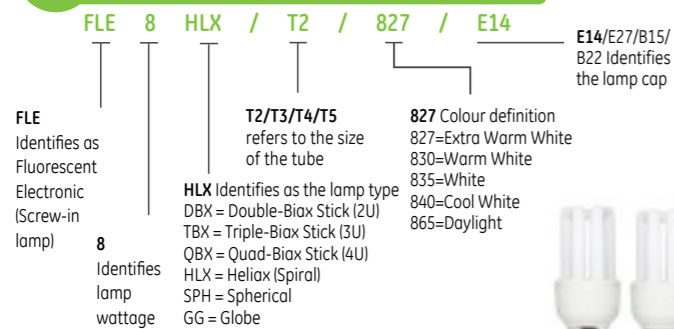

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
LongLast™ Spiral T2 - 15 000 hours														
8	220-240	E27	FLE8HLX/T2/827/E27	71126	470	2700	82	15 000	88	45	8	A	8	12
13	220-240	B22	FLE13HLX/T2/827/B22	75801*	750	2700	82	15 000	97.5	45	13	A	6	13
13	220-240	E27	FLE13HLX/T2/827/E27	75800	750	2700	82	15 000	98.5	45	13	A	6	14
15	220-240	E27	FLE15HLX/T2/827/E27	72390	950	2700	82	15 000	101.5	52	15	A	6	14
15	220-240	E27	FLE15HLX/T2/840/E27	71127*	950	4000	82	15 000	101.5	52	15	A	6	14
20	220-240	E27	FLE20HLX/T2/827/E27	72391	1 250	2700	82	15 000	110	56	20	A	6	14
23	220-240	E27	FLE23HLX/T2/827/E27	72392*	1 500	2700	82	15 000	117	56	22	A	6	14

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
Spiral T2 - 8 000 - 10 000 hours														
8	220-240	E14	FLE8HLX/T2/827/E14	85637	470	2700	82	8 000	93	46	8	A	8	15
8	220-240	E27	FLE8HLX/T2/827/E27	85638	470	2700	82	8 000	90	46	8	A	10	16
8	220-240	E14	FLE8HLX/T2/865/E14	85633	430	6500	82	8 000	93	46	8	A	8	15
8	220-240	E27	FLE8HLX/T2/865/E27	85634	430	6500	82	8 000	90	46	8	A	8	16
12	220-240	E14	FLE12HLX/T2/827/E14	85639	715	2700	82	10 000	102	46	11	A	6	17
12	220-240	E27	FLE12HLX/T2/827/E27	85640	715	2700	82	10 000	100	46	11	A	6	18
12	220-240	B22	FLE12HLX/T2/827/B22	85641	715	2700	82	10 000	99	46	11	A	6	19
12	220-240	E27	FLE12HLX/T2/865/E27	85635	665	6500	82	10 000	100	46	11	A	10	18
12	220-240	E14	FLE12HLX/T2/865/E14	93010291	665	6500	82	10 000	102	46	12	A	10	17
15	220-240	E27	FLE15HLX/T2/865/E27	85636	900	6500	82	10 000	107	50	15	A	10	17
15	220-240	E27	FLE15HLX/T2/827/E27	85642	950	2700	82	10 000	107	50	15	A	10	17
15	220-240	B22	FLE15HLX/T2/827/B22	85643	950	2700	82	10 000	106	50	15	A	6	19
15	220-240	E27	FLE15HLX/T2/827/E27	34175*	950	2700	82	10 000	107	50	15	A	18	18
15	220-240	E27	FLE15HLX/T2/827/E27	89866*	950	2700	82	10 000	107	50	15	A	10	18
20	220-240	E27	FLE20HLX/T2/827/E27	85644	1 220	2700	82	10 000	108	55	19	A	6	18
20	220-240	B22	FLE20HLX/T2/827/B22	85645*	1 220	2700	82	10 000	107	55	19	A	10	19
20	220-240	E27	FLE20HLX/T2/840/E27	85646	1 200	4000	82	10 000	108	55	19	A	6	18
20	220-240	E27	FLE20HLX/T2/865/E27	85647	1 200	6500	82	10 000	108	55	19	A	6	18
20	220-240	E27	FLE20HLX/T2/827/E27	89868*	1 220	2700	82	10 000	108	55	19	A	10	18
23	220-240	E27	FLE23HLX/T2/827/E27	85648	1 450	2700	82	10 000	115	60	22	A	10	18
23	220-240	B22	FLE23HLX/T2/827/B22	85649	1 450	2700	82	10 000	114	60	22	A	10	19
23	220-240	E27	FLE23HLX/T2/840/E27	85650	1 380	4000	82	10 000	115	60	22	A	6	18
23	220-240	E27	FLE23HLX/T2/865/E27	85651	1 380	6500	82	10 000	115	60	23	A	6	18

* Will be phased out



Compact Fluorescent Lamps Integrated

Compact Fluorescent Lamps Integrated

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
Spiral T3 – 8 000-10 000 hours														
1	11	220-240	E27	FLE11HLX/T3/827/E27	89746	580	2700	82	8 000	112	42	10	A	10
1	11	220-240	E27	FLE11HLX/T3/865/E27	89740*	560	6500	82	8 000	112	42	11	A	10
2	20	220-240	E27	FLE20HLX/T3/827/E27	89748*	1 200	2700	82	8 000	124	59	20	A	10
2	20	220-240	E27	FLE20HLX/T3/865/E27	89739*	1 152	6500	82	8 000	124	59	20	A	10
3	20	220-240	E27	FLE20HLX/T3/840/E27	93010063	1 200	4000	82	10 000	127	59	20	A	10
3	20	220-240	E27	FLE20HLX/T3/827/E27	93010066	1 200	2700	82	10 000	127	59	20	A	10
3	20	220-240	E27	FLE20HLX/T3/865/E27	93010074	1 152	6500	82	10 000	127	59	20	A	10
3	23	220-240	E27	FLE23HLX/T3/827/E27	93010064	1 450	2700	82	10 000	134	59	23	A	10
3	23	220-240	E27	FLE23HLX/T3/865/E27	93010073	1 380	6500	82	10 000	134	59	23	A	10
3	24	220-240	E27	FLE24HLX/T3/827/E27	89743*	1 700	2700	82	8 000	135	59	24.7	A	10
3	24	220-240	E27	FLE24HLX/T3/865/E27	89745*	1 650	6500	82	8 000	135	59	24.9	A	10

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
Spiral T4 High Power Factor (HPF) – 10 000 hours														
4	32	220-240	E27	FLE32HLX/T4/827E27/HPF	93010562	2 100	2700	82	10 000	171	66	32	A	6

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
GLS T2/T3 – 6 000 hours														
5	8	220-240	E14	FLE8GLS/T2/827/E14	88178*	370	2700	80	6 000	103.5	52.5	8	A	8
6	8	220-240	E27	FLE8GLS/T2/827/E27	88180*	370	2700	80	6 000	100	52.5	8	A	8
5	12	220-240	E14	FLE12GLS/T2/827/E14	88177*	625	2700	80	6 000	113.5	56	12	A	6
6	12	220-240	E27	FLE12GLS/T2/827/E27	88209*	625	2700	80	6 000	110	56	12	A	6
7	15	220-240	E27	FLE15GLS/T3/827/E27	88176*	830	2700	80	6 000	121	61	15	A	6
8	15	220-240	B22	FLE15GLS/T3/827/B22	88175*	830	2700	80	6 000	120	61	15	A	6

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
GLS T2/T3 – 8 000 hours														
9	12	220-240	E14	FLE12GLS/T2/827/E14	33925*	625	2700	82	8 000	110.5	55	12	A	6
6	12	220-240	E27	FLE12GLS/T2/827/E27	33927*	625	2700	82	8 000	107	55	12	A	6
8	12	220-240	B22	FLE12GLS/T2/827/B22	33926*	625	2700	82	8 000	106	55	12	A	6
10	15	220-240	E27	FLE15GLS/T3/827/E27	33772*	830	2700	82	8 000	118	60	15	A	6
6	15	220-240	B22	FLE15GLS/T3/827/B22	33769*	830	2700	82	8 000	117	60	15	A	6
6	20	220-240	E27	FLE20GLS/T3/827/E27	73273*	1 160	2700	82	8 000	145	65	19	A	6

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty
Spherical T2 – 6 000 hours														
8	5	220-240	B22	FLE5SPH/T2/827/B22	88841*	200	2700	80	6 000	88	45	5	A	8
11	7	220-240	E14	FLE7SPH/T2/827/E14	88842*	310	2700	80	6 000	100	45	7	A	8
8	7	220-240	B22	FLE7SPH/T2/827/B22	88844*	310	2700	80	6 000	88	45	7	A	8

* Will be phased out



Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty	Model
Spherical T2 – 8 000 hours															
5	220-240	E14	FLE5SPH/T2/827/E14	33789*	220	2700	82	8 000	96	45	5	A	8	12	
5	220-240	B22	FLE5SPH/T2/827/B22	33790*	220	2700	82	8 000	92	45	5	A	8	13	
7	220-240	E14	FLE7SPH/T2/827/E14	33928*	320	2700	82	8 000	96	45	7	A	8	12	
7	220-240	B22	FLE7SPH/T2/827/B22	33932*	320	2700	82	8 000	92	45	7	A	8	13	
7	220-240	E27	FLE7SPH/T2/827/E27	33922*	320	2700	82	8 000	93	45	7	A	8	14	

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty	Model
Candle T2/T3 – 6 000-8 000 hours															
7	220-240	E14	FLE7CDL/T2/827/E14	75677*	300	2700	80	6 000	108	37	7	A	8	15	
7	220-240	B22	FLE7CDL/T2/827/B22	88856*	300	2700	80	6 000	104	37	7	A	10	16	
7	220-240	E14	FLE7CDL/T2/840/E14	73451*	300	4000	80	6 000	108	37	7	A	10	15	
11	220-240	E14	FLE11CDL/T3/827/E14	76198*	580	2700	80	6 000	141	50	11	A	6	17	
7	220-240	E14	FLE7CDL/T2/827/E14	33924*	320	2700	82	8 000	105	37	7	A	8	15	
7	220-240	E27	FLE7CDL/T2/827/E27	33919*	320	2700	82	8 000	103	37	7	A	8	18	
7	220-240	B22	FLE7CDL/T2/827/B22	33941*	320	2700	82	8 000	102	37	7	A	10	16	
7	220-240	E14	FLE7CDL/T2/840/E14	33911*	320	4000	82	8 000	105	37	7	A	10	19	
7	220-240	E14	FLE7CDL/T2/827/E14	33939*	320	2700	82	8 000	105	37	7	A	10	19	
9	220-240	E14	FLE9CDL/T2/827/E14	34177*	405	2700	82	8 000	113	37	9	A	18	19	
9	220-240	E14	FLE9CDL/T2/827/E14	33757*	405	2700	82	8 000	113	37	9	A	8	19	
9	220-240	E14	FLE9CDL/T2/827/E14	63623*	405	2700	82	8 000	113	37	9	A	8	21	
9	220-240	E27	FLE9CDL/T2/827/E27	33763*	405	2700	82	8 000	110.5	37	9	A	8	15	
9	220-240	E27	FLE9CDL/T2/827/E27	63624*	405	2700	82	8 000	110.5	37	9	A	8	21	
9	220-240	B15	FLE9CDL/T2/827/B15	33767*	405	2700	82	8 000	111.5	37	9	A	8	20	
9	220-240	B22	FLE9CDL/T2/827/B22	33765*	405	2700	82	8 000	109.5	37	9	A	8	16	

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty	Model
Globe T3 – 8 000 hours															
15	220-240	E27	FLE15GG/827/E27	96776*	805	2700	80	8 000	156	95	15	A	6	22	
20	220-240	E27	FLE20GG/827/E27	73274*	1 160	2700	82	8 000	145	89	19	A	6	22	
20	220-240	E27	FLE20GG/840/E27	96794*	1 152	2700	80	8 000	171	105	20	A	6	23	
20	220-240	E27	FLE20GG/827/E27	96780*	1 152	2700	80	8 000	145	89	19	A	6	22	
23	220-240	E27	FLE23GG/827/E27	73413*	1 371	2700	82	8 000	150	100	21	A	6	22	

* Will be phased out

Model	Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	Candela (Cd)	Beam Angle (°)	CRI (Ra)	Rated life (h)	Length (mm)	Diameter (mm)	Energy Consumption (kWh)	EEC	Pack Qty	Model
Reflector Genura R80 – 15 000 hours																	
23	220-240	E27	EFL23W/827/R80/E27	82174*	580	2700	270	100	80	15 000	130	83	22.50	B	6	24	
23	220-240	E27	EFL23W/830/R80/E27	92246*	580	2700	270	100	80	15 000	130	83	22.50	B	6	24	

* Will be phased out

